



**LET'S BREAK
GROUND
TOGETHER**



www.pengoattachments.com | 800.599.0211

powerful construction attachments

Utility Catalog

MD AUGERS | CHOOSE YOUR OPTION

FEATURES

- Build your own auger from six different options
- For dirt and rock drilling
- Custom augers available

ACCESSORIES

- Revolution Series Drives

OAL	FLIGHT THICK	FLIGHT LENGTHS	HUBS
104" Standard 88", 102" available	5/16" Standard	60" Standard 36", 40", 52" available	H-200, H-250 H-262

OPTION ONE | Typical Dirt Applications

TEETH	PILOT	FLIGHT LENGTHS	HUBS
1851 and 1652 Fas-N-Lok	FH-205	60" Standard 36", 40", 52" available	H-200, H-250 H-262

OPTION TWO | Typical Dirt Applications

TEETH	PILOT	FLIGHT LENGTHS	HUBS
1851 and 1652 Fas-N-Lok	P-1650	60" Standard 36", 40", 52" available	H-200, H-250 H-262

OPTION THREE | High Abrasion, Frozen Soil, Low Impact Applications

TEETH	PILOT	FLIGHT LENGTHS	HUBS
1656 and 1658 Fas-N-Lok	FH-205C	60" Standard 36", 40", 52" available	H-200, H-250 H-262

OPTION FOUR | High Abrasion, Frozen Soil, Low Impact Applications


TEETH	PILOT	FLIGHT LENGTHS	HUBS
1656 and 1658 Fas-N-Lok	P-1656	60" Standard 36", 40", 52" available	H-200, H-250 H-262

OPTION FIVE | Typical Dirt Applications

TEETH	PILOT	FLIGHT LENGTHS	HUBS
1851 and 1652 Fas-N-Lok	TF-600	60" Standard 36", 40", 52" available	H-200, H-250 H-262

OPTION SIX | Fracturable Rock Applications

TEETH	PILOT	FLIGHT LENGTHS	HUBS
SR-86 Strata Conical Tooth	RCP 6.5 Bullet	60" Standard 36", 40", 52" available	H-200, H-250 H-262

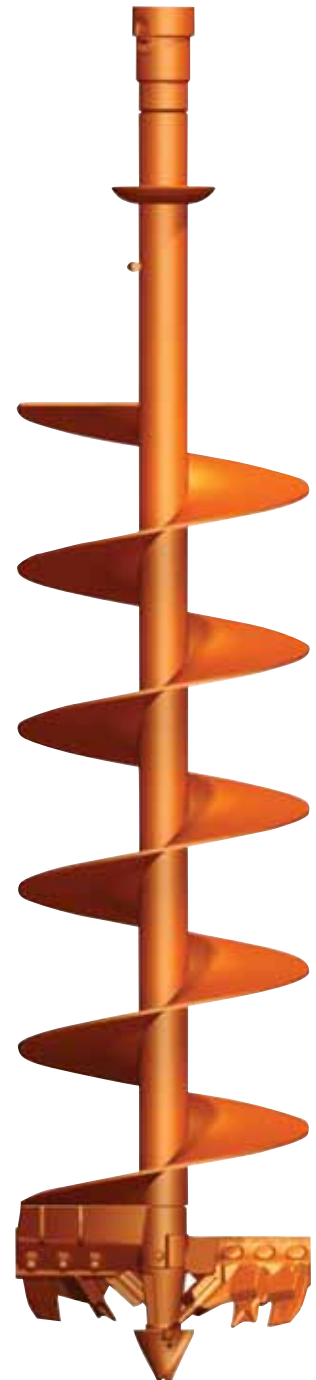

MD AUGERS | MDR STEP ROCK AUGER



FEATURES

- Designed for Solid, Non-Fracturable Rock
- PFC Teeth and Holders
- P-6000 Pilot Bit
- Custom Orders Available

ACCESSORIES

- Revolution Series Drives

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
104" Standard	Single	5/16"	3.75" OD x .312" W

PILOT BIT STYLE	TEETH	HUBS
P-6000	PFC-5	H-200, H-250, H-262

DESCRIPTION	DIA	NO. TEETH	LBS	H-200	H-250	H-262
9-MDR-10460	9"	4	174	101100	554330	101101
10-MDR-10460	10"	4	183	101102	554331	101103
12-MDR-10460	12"	4	217	101104	554332	101105
14-MDR-10460	14"	4	244	101106	554333	101107
16-MDR-10460	16"	4	298	101108	554320	101109
18-MDR-10460	18"	6	327	101110	554335	101111
20-MDR-10460	20"	8	344	101112	554321	101113
24-MDR-10460	24"	12	434	101114	554322	101115
30-MDR-10460	30"	16	560	101116	554338	101117
36-MDR-10460	36"	20	590	101118	554339	101119



MD AUGERS | MD ROCK RIPPER®

FEATURES

- Maximize Drilling for all types of digger derricks
- For solid and fracturable rock and compacted soil
- The All New Strata SR-76 Concial Tooth
- Custom augers available


ACCESSORIES

- Revolution Series Drives



OAL	FLIGHT THICK	FLIGHT LENGTH	HUBS	PILOT	TEETH	HOLDERS
104"	5/16"	60"	H-200, H-250 and H-262	RRP 1.75 Square	SR-76 Bullet	P-10

DESCRIPTION	DIA	NO. TEETH	LBS.	2" HEX	2 1/2" HEX	2 5/8" HEX
9-MRR-10460	9"	10	200	101150	133600	101151
10-MRR-10460	10"	10			134705	
12-MRR-10460	12"	12	250	101152	133601	101153
16-MRR-10460	16"	15	300	101154	133602	101155
18-MRR-10460	18"	16	340	101156	133603	101157
20-MRR-10460	20"	17	360	101158	133604	101159
22-MRR-10460	22"	19		101679	101679	
24-MRR-10460	24"	20	420	101160	133605	101161
30-MRR-10460	30"	24	470	101162	133606	101163
36-MRR-10460	36"	26		101164	133615	101165

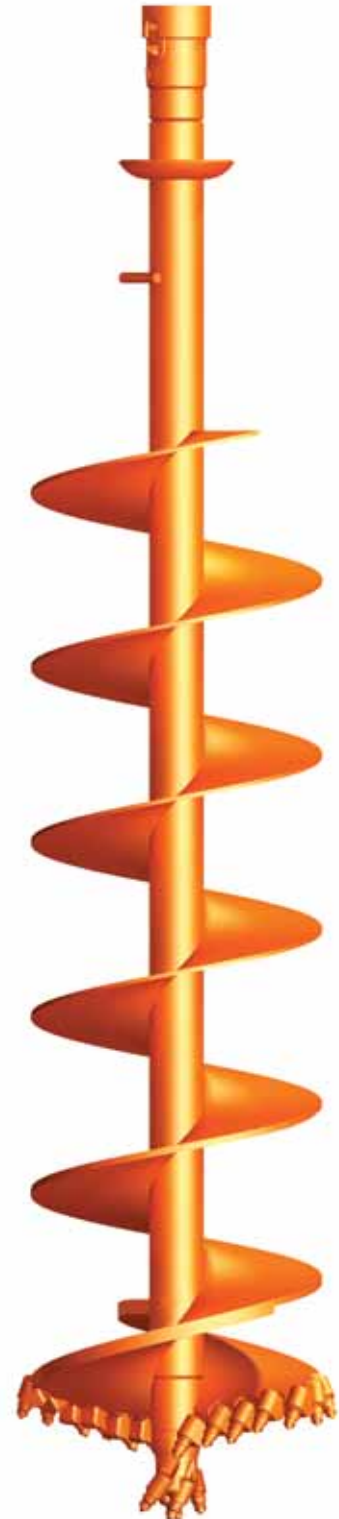

MD AUGERS | MD QUICK CHANGE



FEATURES

- 60" Flight Length
- One Flight Body - Three Head Options
- No Need to Carry Multiple Augers
- 5/16" Thick Single Flight
- 2", 2 1/2" and 2 5/8" Hex Hubs



FLIGHT BODIES

DESCRIPTION	DIA	2" HEX	2 1/2" HEX	2 5/8" HEX
8-FMD-10460	8"	101016	556575	101017
9-FMD-10460	9"	101018	556580	101019
10-FMD-10460	10"	101020	556585	101021
12-FMD-10460	12"	101022	556595	101023
14-FMD-10460	14"	101024	556600	101025
16-FMD-10460	16"	101026	556605	101027
18-FMD-10460	18"	101028	556610	101029

DESCRIPTION	DIA	2" HEX	2 1/2" HEX	2 5/8" HEX
20-FMD-10460	20"	101030	556615	101031
22-FMD-10460	22"	101032	556620	101033
24-FMD-10460	24"	101034	556625	101035
26-FMD-10460	26"	101036	556630	101037
27-FMD-10460	27"	101038	556635	101039
30-FMD-10460	30"	101040	556640	101041
36-FMD-10460	36"	101042	556645	101043



OPTION 1

Carbide/Dirt Head,
1652 and 1650 Teeth,
FH-205 or TF-600 Pilot

ITEM	FH-205	FH-205	TF-600
POMDH-8	556500	101044	101579
POMDH-9	556505	101045	101580
POMDH-10	556510	101046	101581
POMDH-12	556520	101047	101582
POMDH-14	556525	101048	101583
POMDH-16	556530	101049	101584
POMDH-18	556535	101050	101585
POMDH-20	556540	101051	101586
POMDH-22	556545	101052	101587
POMDH-24	556550	101053	101588
POMDH-26	556555	101054	101589
POMDH-27	556560	101055	101590
POMDH-30	556565	101056	101591
POMDH-36	556570	101057	101592



OPTION 2

Step Rock Head,
PFC-5 Teeth, P-6000 Pilot

ITEM	PART NO.
POMDR-9	554680
POMDR-10	554687
POMDR-12	554681
POMDR-14	554688
POMDR-16	554682
POMDR-18	554683
POMDR-20	554684
POMDR-24	554685
POMDR-30	554686
POMDR-36	554689



OPTION 3

Rock Ripper® Head, SR-76
Teeth, RR 1.75 Sq. Pilot

ITEM	PART NO.
POMRR-9	133607
POMRR-12	133608
POMRR-16	133609
POMRR-18	133610
POMRR-20	133611
POMRR-24	133612
POMRR-30	133613
POMRR-36	133620
POMDR-30	554686
POMDR-36	554689


MD AUGERS | PRESSURE DIGGER ROCK

FEATURES

- Great for use in undesirable rocky conditions and areas with minimum ground clearance!
- 3 1/2" Square Hub is Standard
- The All New Strata SR-100 Conical Tooth
- 1" Thick Single Flight

ACCESSORIES

- Revolution Series Drives

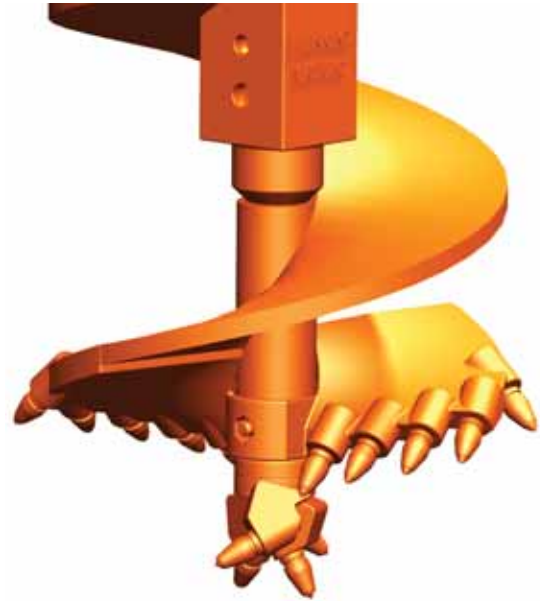

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
30"	Single	1"	4" OD x .75" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	B4-8.5 Pilot	SR-100 Bullet	S-250, S-300, S-350, S-400

DESCRIPTION	NO TEETH	S-250	S-300	S-350	S-400
9-PDR-30	7	102401	102268	137520	
10-PDR-30	4			137518	
12-PDR-30	8	101975	102273	137521	
14-PDR-30	10			102487	
16-PDR-30	8	102460	102365	137522	
18-PDR-30	9	101976		137523	102524
20-PDR-30	11	102386	102603	101890	102069
24-PDR-30	12	101977	102184	137524	102525
26-PDR-30	14			137517	
30-PDR-30	17	102450	102172	137525	102070
32-PDR-30	18	102152			
36-PDR-30	20	102250	101713	137526	102527
42-PDR-30	24		102185	137527	102528
48-PDR 30	28		102360	137528	102529
60-PDR-30	37		102361	137529	102230
72-PDR-30	48	137530		137530	

Pengo® True Cut PDR augers are made with thick, heat-treated cast alloy heads and use heavy-duty 1" shank bullet-style teeth. The cast heat treated head provides superior wear and performance compared to normal fabricated augers.

The PDRs are shipped with the new STRATA Conical Teeth which have a proprietary drilling grade grade that increases the life of the tooth. Less down time means increased production and productivity. Remember to reorder Strata SR-100 to maintain optimum wear.

MD AUGERS | PRESSURE DIGGER DIRT



FEATURES

- PENGOS Fas-N-Lok Dirt Teeth
- 3 1/2" Square Hub is Standard
- 1" Thick Single Flight
- 10", 3-Fluted Pilot Bit Provides Outstanding Ground Penetration

ACCESSORIES

- Revolution Series Drives



OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
30"	Single	1"	4" OD x .75" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF-1000	2070 Series	S-250, S-300, S-350

DESCRIPTION	2070 TEETH	2072 TEETH	S-250	S-300	S-350
9-PDD-30			136352		
12-PDD-30	2	0	136353		
16-PDD-30	2	0			136338
18-PDD-30	2	1	102535		136339
20-PDD-30	2	2			136340
24-PDD-30	3	2	102522		136341
28-PDD-30	4	2			102593
30-PDD-30	6	2			136343
36-PDD-30	8	2		102429	136344
42-PDD-30	10	2			136345
48-PDD-30	10	2	102426	102415	136346
60-PDD-30					136347
72-PDD-30					136348

The Pengo® PDD augers are built with a cast heat treated head that provides superior wear and performance compared to normal fabricated augers. In addition the cast head is field repairable with standard welding techniques, utilizing low hydrogen welding rods and no pre or post heating requirement.




REPLACEMENT HEADS | BORING HEADS

FEATURES

- For Repair of PENGO and Other Augers
- Cast Alloy Steel MDOBH Head

ITEM	NO. TEETH	LBS	PART NO.
8-MDOBH	2	41	552005
9-MDOBH	2	42	552010
10-MDOBH	2	47	552015
11-MDOBH	4	60	552020
12-MDOBH	4	64	552025
14-MDOBH	4	60	552030
16-MDOBH	4	61	552035
18-MDOBH	6	73	552040
20-MDOBH	6	75	552045
22-MDOBH	6	78	552050
24-MDOBH	7	90	552055
26-MDOBH	8	92	552060




ITEM	NO. TEETH	LBS	PART NO.
27-MDOBH	8	109	552065
30-MDOBH	8	121	552070
36-MDOBH	8	140	552075
42-MDOBH	10	160	552076
48-MDOBH	13	180	552077

To Install: The MDOBH has an extended ramp on one side for welding to flight edge. Weld completely around center shaft and flight edge using a low hydrogen rod.

Boring Head Kits Include: FH-205 Pilot and 1650 Series Fas-N-Lok Teeth

REPLACEMENT HEADS | SHANK PLATES

SHANK PLATES



ITEM	MM		TEETH	BOLTS	LBS	PART NO.
8"-10"	203	810X	1	1	5.5	131854
11"-13"	279	12X	2	1	11	131770
14"	356	145X	2	2	10.85	131788
16"	406	16X1	2	2	9.5	131790
16"		16X2	2	2	9.5	131791
18"	457	18X1	3	2	14	131732
18"		18X2	3	2	14	131733
20"	508	20X-1	3	2	14	131866
20"		20X-2	3	2	14	131867
22"	559	22X-1	3	3	16	131974
22"		22X-2	3	3	16	131975
24"	610	24X-1	3	3	18	131872
24"		24X-2	4	3	18	131873
26"-27"	620	267X-1	4	4	20.5	131976
26"-27"		267X-2	4	4	20.5	131977
30	762	30X-1	4	4	25.5	131878
30		30X-2	4	4	25.5	131879
36	914	36X-1	4	4	32	131884
36		36X-2	4	4	32	131885

SHANK & PILOT KIT

- Bolts on to MDOBH Heads
- Allows Drilling in Fracturable Rock
- Kit Contains CP-18 Pilot and SR-86 Teeth

ITEM	LBS	PART NO.
RSK-16	43.5	554230
RSK-18	56.3	554231
RSK-20	51.5	554232
RSK-24	56.5	554233

PENGO STYLE SHANKS

ITEM	LBS	PART NO.
RSP-16	12.5	554240
RSP-18	15	554241
RSP-20	16.5	554242
RSP-24	19	554243

REPLACEMENT HEADS | CAST ROCK HEAD KITS

FEATURES

- Great for Quick Repairs
- Heat-Treated Cast Auger Head
- Field Repairable with Standard Welding Techniques
- SR-100 Strata Conical Teeth and Pilot

ITEM	NO. TEETH	PART NO.
ROCK 16"	8	752800
ROCK 18"	9	752801
ROCK 20"	11	752802
ROCK 24"	12	752803
ROCK 30"	17	752804
ROCK 36"	20	752805
ROCK 42"	24	752806
ROCK 48"	28	752807



INCLUDED IN KIT: Cast Head, Pilot Bit, Teeth

REPLACEMENT HEADS | CAST DIRT HEAD KITS

FEATURES

- Low Maintenance, High Strength!
- Heat-Treated Cast Auger Head
- Field Repairable with Standard Welding Techniques
- TF-1000 Pilot and 2070 Series Fas-N-Lok Teeth

ITEM	NO. TEETH	PART NO.
DIRT 16"	4	752810
DIRT 18"	6	752811
DIRT 20"	6	752812
DIRT 24"	6	752813
DIRT 30/36"	6	752814
DIRT 42/48"	6	752815



INCLUDED IN KIT: Cast Head, Pilot Bit, Teeth

ACCESSORIES | REVOLUTION SERIES DRIVES


REVOLUTION DRIVES

Larger, more efficient gearboxes | Two-piece bail design, top section is removable for easy access to motor | Single-speed models have efficient Eaton motors | All two-speed models are automatic shift | Added cooling option for all two-speed models | All models have a crossover pressure relief system which protects the drive



The RevTrak™ system developed by Pengo® is a torque monitoring and logging system using innovative technology such as MMC/SD data logging to measure and record the helical pier/anchor installation



Part No. 610309
RevTrak™
Monitoring System

Part No.	Model	Connection	Speed Config.	Max Flow (gpm)	Max Pressure (psi)	Torque Low (ft/lbs)	Torque High (ft/lbs)	Speed (rpm)	Recommended Prime Mover							
									Mini Skid Steer	Compt Digger Derrick	Compt Excavator	Skid Steer Loader	Digger Derrick	Backhoe (TLB)	Excavator	Excavator Size (metric tons)
610173	DT-5	H-250	Two	40	3000	2465	4930	50 / 100	■	■	■	■	■	■	■	5T - 8T
610174	DT-15	H-300	Two	50	3000	7738	15478	20 / 40					■	■	■	17T - 25T
610207	RS-7	H-200	Single	25	2500	0	7512	18	■	■	■					5T - 8T
610057	RS-12	H-250	Single	40	3000	0	13014	18			■	■	■	■		11T - 17T
610058	RT-9	H-250	Two	50	3000	4925	9850	31 / 63			■	■	■	■		8T - 13T
610059	RT-12	H-250	Two	50	3000	5753	12330	25 / 54			■	■	■	■		11T - 17T
610060	RT-20	H-300	Two	50	3000	11331	22662	13 / 25						■	■	17T - 25T

CONNECTION SIZES: H-200 = 2" Hex, R-256 = 2 9/16" Round, H-250 = 2 1/2" Hex, H-300 = 3" Hex, H-400 = 4" Hex

Disclaimer:

Output speed and torque specifications are NOT listed at 100% efficiency. Maximum efficiencies have been applied to the torque and speed charts according to the manufacturers recommendations. Speed and torque output are dependant on the overall system efficiencies associated with the prime movers hydraulic system. When the purchaser is determining criteria for specific applications please contact Pengo. Pengo has made every attempt to present accurate and suitable information published on this document. This document should be used for information and comparative purposed only. When application specific information is required, please contact Pengo.

Pengo continually looks for new ways to improve its products. Therefore, Pengo reserves the right to make changes to our products and specifications without notice.

PARTS | PILOT BIT ASSEMBLIES

Assemblies include pilot bit, nuts, bolts and teeth if applicable.

TRIFLOW® 600

Patented pilot bit for use with PENGO Pressure Digger Dirt Augers and Cast Dirt Head Kits.



ITEM	LBS.	PART NO.
TF-600		137357

P-1650 SERIES

For use with MD augers in typical dirt drilling conditions.



ITEM	LBS.	PART NO.
P-1650	20	131726
P-1656	24	131727
P-6000	8	151275

CENTER POINT

For use with MD augers in fraturable rock conditions.



ITEM	LBS.	PART NO.
RCP-6.5	18	132116
CP-16	1	132524
CP-18		151272

CP-16 and CP-18 are the center point for the RCP pilot.

NUTS & BOLTS



ITEM	LBS.	PART NO.
5/16" X 1 1/2"	.2	151660
5/8" X 1 1/2"	.2	151640
3/8" X 3"	.2	151672
3/8 X 1 3/4"	.2	151670
1/2" X 4 1/2"	.2	151680

HF	=	Hard-Faced
C	=	Carbide Tipped
CXC	=	Carbide
HFTC	=	Hard-Faced, Carbide

SCREW BIT

Screw Bits are for use with MD Boring Heads in dirt, abrasive, frozen soil and low impact applications.



ITEM	LBS.	PART NO.
SB-100	6.3	132363
SB-100C	6.2	132903
SB-100HFTC		133272
SB-50	3.4	131728
SB-50C	3.4	131751
SB-50HF	3.6	132937
SB-50HFTC	3.1	132624
SB-60	4.4	132029
SB-60C	4.6	132803
SB-60CXC	4.6	133252
SB-60HF	4.6	133251
SB-60HFTC	5.5	133254
SB-70	4.5	132185
SB-70C	4.8	132368
SB-70CXC		133255
SB-70HF	4.5	132960
SB-70HFTC		133256
SB-80	5.5	132198
SB-80C	5.4	132638
SB-80CXC		133258
SB-80HF		133257
SB-80HFTC		133259
SB-90	5.8	132552
SB-90C		133260
SB-90CXC		133261
SB-90HF	5.5	132898
SB-90HFTC		133271
FH-205	2.1	157382
FH-205C	2.1	132260
FH-205CXC	2.1	132825
FH-205HF	2.1	131725
FH-205HFTC	3.7	133264
FH-205HFF	3	132201

ROCK RIPPER®

For Use with MD Rock Ripper® auger system in hard rock applications.



ITEM	LBS.	PART NO.
RR-API/C20	17.1	157406
RR-1.75 SQ	15	137208
RRP-MD	16	134675

TUNGSTEN CARBIDE HEAD

For Use with Step Rock Augers.



ITEM	LBS.	PART NO.
45-TCH-171M		133578
5.5-TCH-171L	6.1	133267
6.5-TCH-171L	8.3	133268
8.5-TCH-171L		133269
9.5-TCH-171L		133270

PILOT BIT ADAPTERS

For Use with MD Auger Pilot Bits.



ITEM	LBS.	PART NO.
MF-MM	2	151020
PA-182-L	4.3	151100
PA-183-L	7.9	151110
PE-151	10.5	152145
8"OD X 4"SQ	43	135904
3.5"OD 1-3/4 S	4.2	151593
6"OD 2-1/2" SQ	17.8	151598

PARTS | REPLACEMENT TEETH



FAS-N-LOK®

Fas-N-Lok Dirt teeth eliminate the need for RubR-Lok. For use with MD Dirt Augers.



ITEM	LBS.	PART NO.
1650 DIRT	1	140200
1652 DIRT GAGE	1.1	140020
1652-HF GAGE	1	140086
1656 CARBIDE	1.3	140005
1658 CAR GAGE	1.4	140006
RB56		140022
RB58	1	140015
1851 DIRT	1	140017
2070	2	140002
2072	2.3	140000
2077 CARBIDE	2.3	140003
2078	2.4	140004
2079	3.9	140001
7R55	1	140018
16R55 DIRT	1	140019

ITEM	LBS.	PART NO.
RUBR-LOK	.1	137601

Due to varying manufacturers tolerances, RubR-Lok® might be necessary to obtain the correct fit.

BULLET

Pengo's New Strata Series Drilling Grade Carbide bullet teeth are for use in solid fracturable rock and compacted soil.



ITEM	LBS.	PART NO.
SR-86	.56	850031
SL-04	.56	850016
SR-122	2.6	850034
SR-100	1.1	850023

ROCK RIPPER®

New Strata Conical Tooth for Use with MD Rock Ripper® Augers in solid fracturable rock and compacted soil.



ITEM	LBS.	PART NO.
SR-76	.5	850032

BULLET

Pengo's standard bullet teeth are for use in solid fracturable rock and compacted soil.



ITEM	LBS.	PART NO.
S-31HD	.56	850037
S4-1	.56	850038
S-22	2.6	850039

TAPER FIT

Pengo's bullet teeth are for use in solid fracturable rock and compacted soil.



ITEM	WIDTH	LBS	PART NO.
60 DIRT	2-9/16"	1	170006
70 DIRT	1-5/8"	1	170020
80 DIRT	2-5/8"	2	170008
80C CARBIDE	2-5/8"	2	170003
90P DIRT	1-3/4"	1.7	134855
95P DIRT	1-1/4"	1.5	170015
132 DIRT	3-1/2"	2	134406
134 DIRT GAGE	5"	2	134411
201 DIRT	2-1/2"	2.1	170030
201C CARBIDE	2-1/2"	2.1	170029
211 DIRT	3-3/8"	2.9	170034
299 CARBIDE	2-3/8"	2.8	134659
PFC-2 CARBIDE	2-5/8"	2.5	140112
PFC-5 CARBIDE	2-1/4"	1	140115
SZ210	2-7/8"	2.5	170032
SZ211	3-3/16"	3.5	170039

DRAG-STYLE

Carbide tooth for use with GP Step Rock Augers in hard rock applications.



ITEM	LBS.	PART NO.
CB-10	.8	140055
604-C	.75	140065

PARTS | HOLDERS

BULLET TEETH HOLDERS



ITEM	LBS.	PART NO.
B48		800072
P-30	2.5	990001
P-10	.8	990043

DIRT / DRAG TEETH HOLDERS



ITEM	LBS.	PART NO.
H-10	.28	157025
FA-70	2	158110
1ASR	2.4	156980
B-256	2.5	155000
C-355	3	155010
E-555	2.5	154990
PFC-5H	1.5	157027

ITEM	LBS.	PART NO.
WO-1	1.5	171565
WO-12	2.6	171570
WO-5	4.0	171575
WO-5HDS	4.5	171574
WO-08	5.3	171577
WO-12	2.6	171570

**CONTACT PENGO SALES
AT 800.599.0211
FOR COMPLETE LISTING
OF REPLACEMENT PARTS**

PARTS | HUBS and HUB ADAPTERS

HEX HUBS

Cast alloy hubs used to upgrade or repair any brand of auger.


SQUARE HUBS

Cast alloy hubs used to upgrade or repair any brand of auger.


**FEMALE ADAPTERS
HEX FEMALE**


ROUND MALE

ITEM	SIZE	LBS.	PART NO.
RH-1375	1 3/8"		133156
RH-812	13/16"	.6	153955
RH-1625	1 5/8"	3.1	153958
H-200U	2" UNIVERSAL	10.5	154121
H-250	2 1/2" SLOTTED	19.7	154141
H-262	2 5/8" SLOTTED	17.6	154151
H-225	2 1/2" CAST	12.5	154160
H-300	3" CAST	21	154205

ITEM	SIZE	LBS.	PART NO.
S-200	2" CAST	19	153990
S-225	2-1/4" FAB		154002
S-250	2 1/2" CST	21	154010
S-300	3" CAST	40	154020
S-350	3 1/2" CST	52.3	154030
S-400	4" CAST	65	154050
S-130MM	CAST	100	154161
S-150MM	CAST	175	154162
S-177MM	CAST	205	154163

ITEM	LBS.	PART NO.
H-200F X H-250M	22	132609
H-200F X H-262M	23	133379
H-200F X R-200M	14	557156
H-225F X H-200M	20	557159
H-250F X H-200M	30	132419
H-250F X H-262M	31	136466
H-250F X R-256M	31	151025
H-250F X S-200M	29	132946
H-250F X S-250M	33	133560
H-250F X H-262M		136466
H-250F X S-200M		132946
H-250F X S-250M		133560
H-262F X H-200M	26	133938
H-262F X H-225M	26	133939
H-262F X H-250M	30	132702
H-262F X S-250M	30	132703
H-262F X S-300M		133923
S-250F X H-225M	32	132842
S-300F X S-250M		133137
S-350F X S-300M		134797

More adapters available. Contact customer service for more information.

SCREW ANCHOR TOOL

The SAT screw anchor tool is used for installing anchors, without having to remove the auger. Slip the tool over the pilot bit. (FH-205, FH-105, C-120, SB-50) as shown.

Insert the thimble (eye) of the anchor into the end of the SAT-80. Screw anchor into the ground.

ITEM	LBS.	PART NO.
SAT-80	15.5	157530



CAUTION: The SAT-80 is for use only on pressure diggers and only for installation, never for removal of anchors. Failure to meet these precautions may cause safety hazards.

PARTS | ACCESSORIES

DRIVE LUGS

Cast alloy drivelugs used with screw bits can upgrade or repair any brand of auger.


STORAGE ACCESSORIES

These items are optional accessories for your MD auger.



ITEM	PILOT	LBS.	PART NO.
141-L	375-TCH-171	1.3	151970
141-R	SB-35 or SB-45	1	151956
141-MT	SB-35 or SB-45	1.3	151960
MF-MM	SB-35 or SB-45	2.2	151020

ITEM	LBS.	PART NO.
10" 1345-3.75 DISH	6.8	151735
10" CUST - 4" ID DISH		132875
8" 1345-3.00 DISH	4.5	151732
8" 1345-3.75 DISH	4.5	151731
2 3/8" API, 3 1/2" OD BOX THREAD	6.1	132191
2-3/8" API, 4" OD BOX THREAD		151193
REACH ALL WIND-UP	0.8	157704

DRIVE PINS


ITEM	AUGER DIA	DIMS Dia x OAL	LBS.	PART NO.
DP-2	2"	3/8" x 1-1/2"	.1	157779
DP-3	3"	1/2" x 2"	.1	157780
DP-4	4"	5/8" x 2-3/4"	.3	157781
DP-5	5"	5/8" x 2-3/4"	.5	157782


TOOLS

ITEM	LBS.	PART NO.
SOFT HAMMER	3.5	137737
DRIFT PUNCH	.8	137750
HORSESHOE NAIL	1	137620
RUBR-LOK	.1	137601
P-10 Pin	.1	137610



PARTS | EXTENSIONS AND COUPLERS

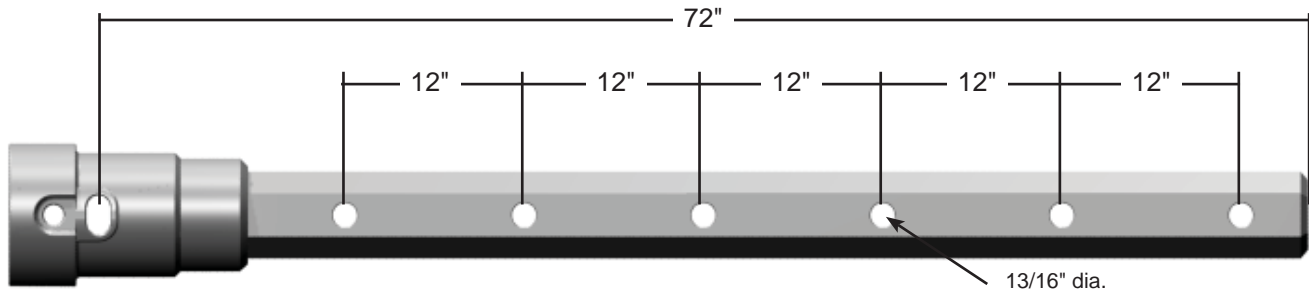
MD TELESCOPING

ITEM	DESCRIPTION	PART NO.
HE20-12	2" HEX X 12"	557142
HE20-24	2" HEX X 24"	557143
HE20-36	2" HEX X 36"	557144
HE20-48	2" HEX X 48"	557145
HE20-60	2" HEX X 60"	557146
HE20-72	2" HEX X 72"	557147
HE20-84	2" HEX X 84"	557148
HE20-96	2" HEX X 96"	557149
HE20-120	2" HEX X 120"	557150
HE20-144	2" HEX X 144"	557151
HE25-12	2 1/2" HEX X 12"	557126
HE25-24	2 1/2" HEX X 24"	557162
HE25-36	2 1/2" HEX X 36"	557128
HE25-48	2 1/2" HEX X 48"	557129
HE25-60	2 1/2" HEX X 60"	557130
HE25-72	2 1/2" HEX X 72"	557163
HE25-90	2 1/2" HEX X 90"	135598
HE26-12	2 5/8" HEX X 12"	557119
HE26-24	2 5/8" HEX X 24"	557120
HE26-36	2 5/8" HEX X 36"	557121
HE26-48	2 5/8" HEX X 48"	557122
HE26-60	2 5/8" HEX X 60"	557160
HE26-72	2 5/8" HEX X 72"	557161
HE225-72	2 1/4" HEX X 72"	557140
	H-250F X H-262M X 72"	557172
	H-262F X H-250M X 72"	557170

2" HEX TELESCOPING

ITEM	LBS.	PART NO.
HE20-12 STANDARD	22	557142
HE20-24 STANDARD	34	557143
HE20-36 STANDARD	46	557144
HE20-48 STANDARD	58	557145
HE20-60 STANDARD		557146
HE20-72 STANDARD		557147
HE20-84		557148
HE20-96		557149
HE20-120		557150
HE20-144 HT		557151

3" HEX


ITEM	LBS.	PART NO.
H300 X 24" OAL		134870
H300 X 36" OAL	98	134871
H300 X 48" OAL	124	134872
H300 X 60" OAL		134844
H300 X 72" OAL	175	134847
H300 X 102" OAL		134828

**EXTENSION BARS
no HUBS with HOLES**

ITEM	LBS.	PART NO.
2" HEX X 72" STD		137570
2-5/8" HEX X 72" STD		137572
H-250 X 72" STD		137571

**EXTENSION BARS
no HUBS no HOLES**

ITEM	LBS.	PART NO.
H-200 X 72" HEX BAR	70.7	151125
H-225 X 72" HEX BAR	89.5	151126
H-250 X 72" HEX BAR	110.5	151127
H-262 X 72" HEX BAR	110.5	151128

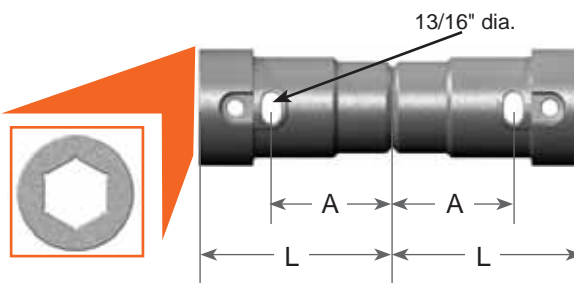
MD HEX COUPLERS


ITEM	DESCRIPTION	A	L	LBS.	PART NO.
H-200-C	2" x 2"	3"	8"	13	553400
H-250-C	2 1/2" x 2 1/2"	5"	8"	22	553402
H-262-C	2 5/8" x 2 5/8"	5"	8"	21	553403

ITEM	PART NO.
H262 X H262	553399
H250 X H262	553407
H262 X H262	553411
H200 X H200	553412
H200 X H200	553413
H200 X H262	553414
H200 X H262	553415
H200 X H250	553416
H200 X H250	553417
H250 X H262	553418
H250 X H262	553419

**CONTACT PENGO SALES
AT 800.599.0211
FOR COMPLETE LISTING
OF REPLACEMENT PARTS**

sales contacts

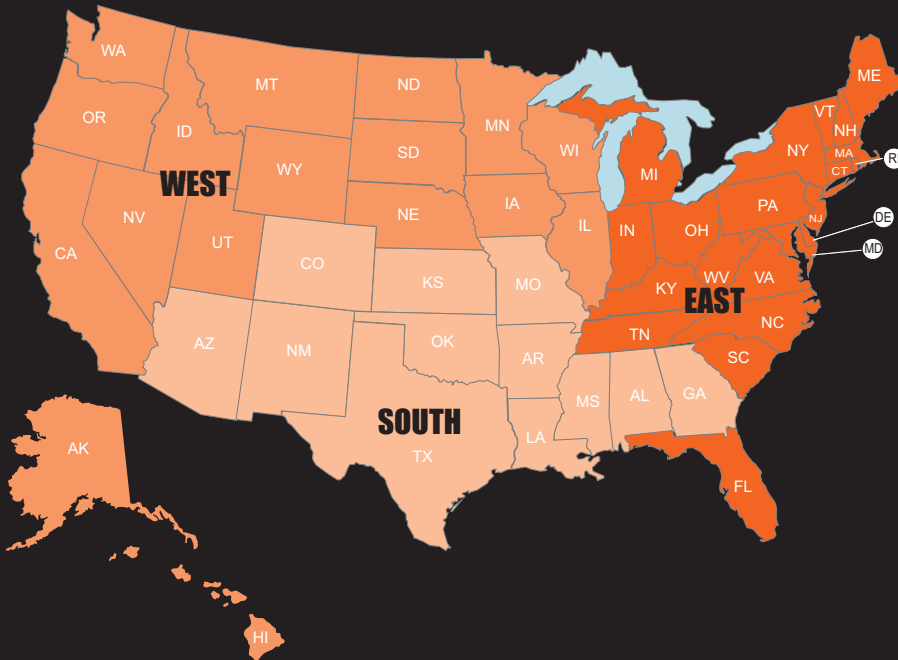

Eric Hennarichs, Regional Sales Manager, East
317.286.8386 ehennarichs@paladinbrands.com

Gerry Logan, Regional Sales Manager, West
515.302.0206 glogan@paladinbrands.com

Brad Blackstone, Regional Sales Manager, South
972.489.7361 bblackstone@paladinbrands.com

Mary Pohlman, Product Specialist
319-491-7943 mpohlman@paladinbrands.com

Dawn Jamison, Manager, OEM & Sales Admini.
319.210.6895 djamison@paladinbrands.com

Dana Scudder, VP Sales & Marketing
561.400.9311 dscudder@paladinbrands.com

Pengo Limited Warranty

Products manufactured by Pengo wear and are expendable in their function. Wear and tear and occasional breakage must, therefore, be expected.

Pengo products are warranted from defects in material and workmanship for a period of Sixty (60) Days from the date of invoice. Pengo will either replace or credit the defective part at it's option. Any labor and/or material required to remove or install parts is excluded under this Limited Warranty. Products that have been misused, misapplied, hardfaced, improperly welded, or otherwise installed contrary to instructions and specifications are not covered by this Limited Warranty.

Pengo reserves the right to make design, specification and prices changes without notice and obligations to the affect of such changes.

Pengo makes no other warranty. All other warranties, whether express, implied or statutory, such as warranties of merchantability of fitness for a particular purpose, are hereby excluded and disclaimed to the extent that they exceed the warranties expressly granted in this limited warranty. In no event shall Pengo be liable for consequential or incidental damages. Whether direct or indirect, claimed by the customer and/or any third parties.

Returns and Claims

1. Pengo reserves the right to determine whether products claimed to be defective shall be inspected by our personnel in the field or returned to the factory. If judged by Pengo to be defective in material or workmanship, the product will be replaced or a credit issued at the option of Pengo.
2. Upon notification of defect, Pengo's Inside Sales Department will issue a Return Goods Authorization number (RGA). All returns for replacement or credit MUST be accompanied by a RGA number. Products returned without a RGA number will be rejected and returned to the sender freight collect.
3. All returns must be shipped "prepaid". Products shipped "collect" will be refused. Proof of purchase such as invoice number must accompany returns.
4. Slow moving dealer inventory may be returned once per calendar year. The net value cannot exceed 5% of the previous year's purchases. A 20% re-stocking charge will apply to the net value or returned products. All returns must be of current manufacture and in un-used condition. Rusty or custom painted products will not be accepted for return.



Distributed By:



Website

Scan these QR codes with your smart phone and gain instant access to our web site or call us automatically.

Not familiar with QR codes? Simply go to www.inigma.mobi on your mobile device. I-nigma will automatically identify your smart phone and install the code reader.



Phone

PENGO
500 EAST HIGHWAY 10
LAURENS, IA 50554
PH: 800.599.0211 OR 712.845.2540
FX: 712.845.2497
WWW.PENGOATTACHMENTS.COM
PENGOSALES@PALADINBRANDS.COM

© COPYRIGHT 2012 PENGO



INTERNATIONAL
EQUIPMENT
SOLUTIONS

www.iesholdings.com