


PRESSURE DIGGER DIRT



30" and 36" OAL

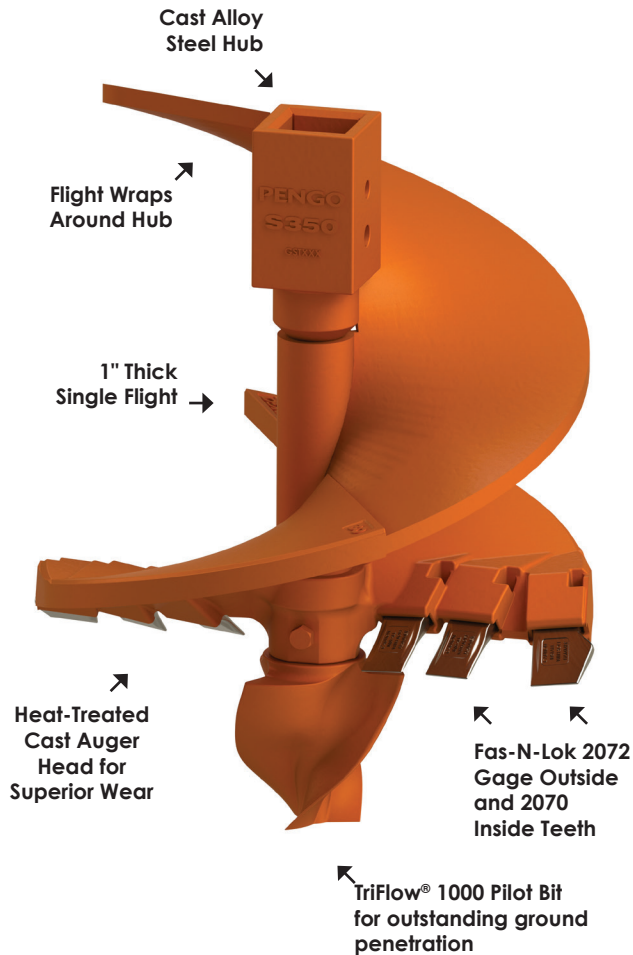

CONNECTIONS

SQUARE	2 1/2"
SQUARE	3"
SQUARE	3 1/2"
SQUARE	4"

AUGER DIAMETERS

9"	12"	16"	18"	20"	24"	28"
30"	36"	42"	48"	60"	72"	

CUT DIAMETER

True Cut diameter is equal to the auger diameter.

DRILLING SOIL CONDITIONS:

HIGHLY RECOMMENDED		RECOMMENDED		NOT RECOMMENDED		
1	2	3	4	5	6	7
dirt	sand	silt	clay	gravel	fracturable rock	non-fracturable rock



The Pengo PDD augers feature a cast heat treated head that provides superior wear and performance compared to normal fabricated augers. In addition the cast head is field repairable with standard welding techniques, utilizing low hydrogen welding rods and no pre or post heating requirement.

These rugged augers feature a 1 1/2" thick lead flight followed by a 1" thick formed trailing flight. The 10" cut three-flute TriFlow® pilot provides outstanding ground penetration. PDD bits are equipped with Pengo's exclusive Fas-N-Lok® teeth, making replacement quick and easy.