

UTILITY AUGERS



DIRT AUGERS | 104" Overall Length, 60" Flight

Item Description

ITEM	DIA	NO. 1851
8-MD-10460	8"	0
9-MD-10460	9"	0
10-MD-10460	10"	0
12-MD-10460	12"	2
14-MD-10460	14"	2
16-MD-10460	16"	2
18-MD-10460	18"	4
20-MD-10460	20"	4
22-MD-10460	22"	4
24-MD-10460	24"	5
27-MD-10460	27"	6
30-MD-10460	30"	6
36-MD-10460	36"	6
42-MD-10460	42"	8
48-MD-10460	48"	8

with FH-205 Pilot

LBS	2 1/2" PN	2 5/8" PN
171	552375	100049
170	552380	100107
195	552385	100165
	552390	100224
	552395	100282
	552400	100359
350	552405	100441
	552410	100523
	552415	100585
440	552420	100663
	552425	100725
	552430	100783
595	552435	100841
	552436	100899
	552437	100957

with P-1650 Pilot

LBS	2 1/2" PN	2 5/8" PN
191	100043	100051
109	100101	100109
215	100159	100167
	100218	100226
	100275	100284
	100350	100362
370	100431	100443
	100513	100525
	100579	100587
460	100653	100665
	100719	100727
	100777	100785
615	100835	100843
	100893	100901
	100951	100959

with TF-600 Pilot

LBS	2 1/2" PN	2 5/8" PN
171	100057	100058
170	100115	100116
195	100173	100174
250	100231	100232
	100289	100290
	100371	100372
350	100453	100454
	100535	100536
	100593	100594
440	100675	100676
	100733	100734
	100791	100792
595	100849	100850
	100907	100908
	100965	100966



*All dirt augers above include two 1652 outside gage teeth.

CARBIDE AUGERS | 104" Overall Length, 60" Flight



Item Description

ITEM	DIA	NO. 1656
8-MD-10460	8"	0
9-MD-10460	9"	0
10-MD-10460	10"	0
12-MD-10460	12"	2
14-MD-10460	14"	2
16-MD-10460	16"	2
18-MD-10460	18"	4
20-MD-10460	20"	4
22-MD-10460	22"	4
24-MD-10460	24"	5
27-MD-10460	27"	6
30-MD-10460	30"	6
36-MD-10460	36"	6
42-MD-10460	42"	8
48-MD-10460	48"	8

with FH-205C Pilot

LBS	2 1/2" PN	2 5/8" PN
171	100045	100053
170	100103	100111
195	100161	100170
235	100219	100227
265	100277	100285
305	100351	100364
350	100434	100445
385	554547	100527
415	100582	100589
440	554549	100667
	100721	100729
	100779	100787
595	100837	100845
	100895	100903
	100953	100961

with P-1656 Pilot


LBS	2 1/2" PN	2 5/8" PN
191	100047	100055
109	100105	100113
215	100163	100172
	100222	100230
	100281	100288
	100353	100366
370	100435	100447
	100517	100529
	100583	100591
460	100657	100669
	100723	100731
	100781	100789
615	100839	100847
	100897	100905
	100955	100963

*All dirt augers above include two 1658 outside gage teeth.

ROCK AUGERS | 104" OAL, 60" Flight

Item Description

ITEM	DIA	NO. SL02	LBS	2 1/2" PN	2 5/8" PN
16-MD-10460	16"	8		100357	100369
18-MD-10460	18"	10	370	100439	100451
20-MD-10460	20"	10		100521	100533
24-MD-10460	24"	12	506	100661	100673

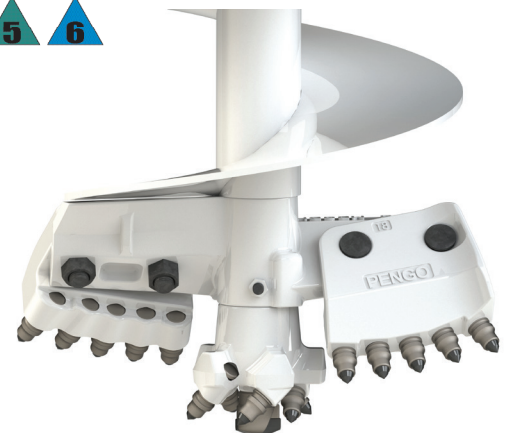

Additional sizes available by contacting Pengo Customer Service at 800.599.0211.

UTILITY AUGERS




PARTS | Pilot Bits

ITEM		LBS	PART NO.
FH-205		2.7 LBS	157382
TF-600		8.5 LBS	137357
P-1650		8.5 LBS	131726
FH-205C		3 LBS	132260
P-1656		24 LBS	131727
RCP 6.5 Bullet		18 LBS	132116

RCP Pilot Includes 5 SL-02 Teeth and CP-18

Pengo Pilots and Teeth are rated for drilling conditions that may or may not be applicable to your power source. Refer to the soil chart listed on page 2 of the Utility Catalog to determine which tooth type is right for the job.

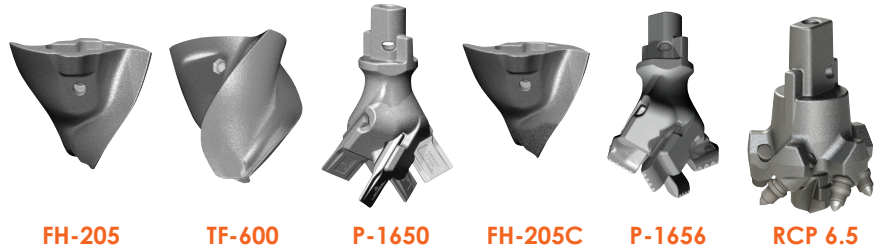

The RCP 6.5 Pilot uses the above Center Point 18. A Center Point 16 is also available.



PARTS | Fas-N-Lok® Teeth


ITEM		LBS	PART NO.
1650 Dirt		.5 LBS	140200
1851 Dirt		.5 LBS	140017
1652 Gage		.5 LBS	140020
1652 HF		.6 LBS	140086
1656		.6 LBS	140005
1658 Gage		1 LBS	140006
RB56		.4 LBS	140022
RB58		.4 LBS	140015



Fas-N-Lok® Teeth are manufactured with vulcanized rubber attached to the inside of the tooth, thus eliminating the need for RubRLok.

PARTS | Concial Teeth

ITEM		LBS	PART NO.
SL-02	.87 Shank Dia.	.6 LBS	850031
S-387-BF		.4 LBS	850030

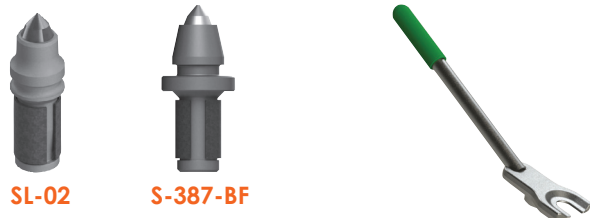

C123 Puller
Use with .86 shank size conical teeth
LBS | 3
PN | 134091

TRIDENT® SERIES | Holder and Teeth


One Holder, Three Teeth for Pengo Utility augers

TRIDENT®
U.S. Patent No. D778,967

Conical Tooth

Non-Rotating Tooth


Non-Rotating Wedge Tooth

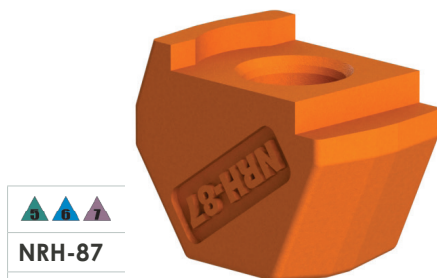

NRH-87
Fits .87" shank tooth
LBS | .56 ea.
PN | 990087



SL-02 Tooth
.87" shank
LBS | .56 ea.
PN | 850031



NR-87 Tooth
.87" shank
LBS | .99 ea.
PN | 990094



NRW-87 Tooth
.87" shank
LBS | 1.33 ea.
PN | 990100

UTILITY AUGERS




PARTS | MD Boring Heads

To Install: The MDOBH has an extended ramp on one side for welding to flight edge. Weld completely around center shaft and flight edge using a low hydrogen rod.

ITEM	DIA	NO. 1851	LBS	PN
8-MDOBH	8"	0	41	552005
9-MDOBH	9"	0	42	552010
10-MDOBH	10"	0	47	552015
12-MDOBH	12"	2	64	552025
14-MDOBH	14"	2	60	552030
16-MDOBH	16"	2	61	552035
18-MDOBH	18"	4	73	552040
20-MDOBH	20"	4	75	552045
22-MDOBH	22"	4	78	552050
24-MDOBH	24"	5	95	552055
26-MDOBH	26"	6	105	552060
27-MDOBH	27"	6	109	552065
30-MDOBH	30"	6	121	552070
36-MDOBH	26"	6	140	552075
42-MDOBH	42"	8	160	552076
48-MDOBH	48"	11	180	552077

Boring Head Kits
Include: Shank Plates, PA-183L Pilot Bit Adapter, FH-205 Pilot, two 1652 and 1851 Teeth Series Fas-N-Lok® Teeth, nuts and bolts.

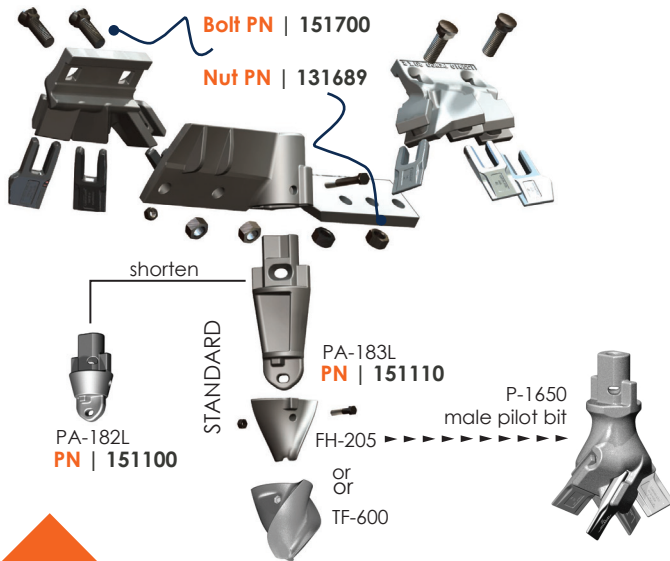

MD BORING HEAD

PENGO Utility Augers provide an abundance of drilling options. The above diagram depicts a typical Pengo dirt auger boring head with standard teeth and pilot bits. These boring heads provide many options depending on your drilling conditions.



Pengo's Quick Ship Auger Program

HOW IT WORKS: **1.** Select any ONE size auger from the list below. **2.** Place your order by 12:00pm CST with your Pengo Customer Service Representative and be sure to reference P.D.Q. when ordering. **3.** Auger(s) will ship by the end of the day to your chosen location.

TF-600 1851 and 1652 Fas-N-Lok® Teeth

ITEM	DIA	NO. 1656	LBS	2 1/2" PN	2 5/8" PN
18-MD-10460	18"	4	350	103312	100454
20-MD-10460	20"	4	385	103319	100536
22-MD-10460	22"	4	415	103326	100594
24-MD-10460	24"	5	440	103331	100676

FH-205C Pilot, 1656 and 1658 Fas-N-Lok® Teeth

18-MD-10460	18"	4	350	103313	100445
20-MD-10460	20"	4	385	103320	100527
22-MD-10460	22"	4	415	103327	100589
24-MD-10460	24"	5	440	103332	100667


RCP-6.5 Pilot and SL-02 Concial Teeth

18-MD-10460	18"	4	350	100439	100451
20-MD-10460	20"	4	385	100521	100533
24-MD-10460	24"	5	440	100661	100673

NOTE: Only one auger per size, per order will ship same day. Standard transit lead time applies to destination. Applies only to augers listed above. H-250 and H-262 Augers will be shipped with dish welded to auger.

SCREW ANCHOR TOOL

The SAT-85 is used for installing and removing anchors, without having to remove the auger. Slip the SAT-85 over the pilot, lock, and you are ready to attach your anchor.



SAT-85

LBS | 17

PN | 157533

REPLACEMENT PARTS for SAT-85

U-BOLT	157534
NUT	131683

CAUTION: The SAT-85 is for installation of anchors. You may use it to remove anchors as long as the u-bolt is securely in place. Failure to meet these precautions may cause safety hazards.