


FLAT BOTTOM DIRT AUGER



Double Cut Double Carry shown

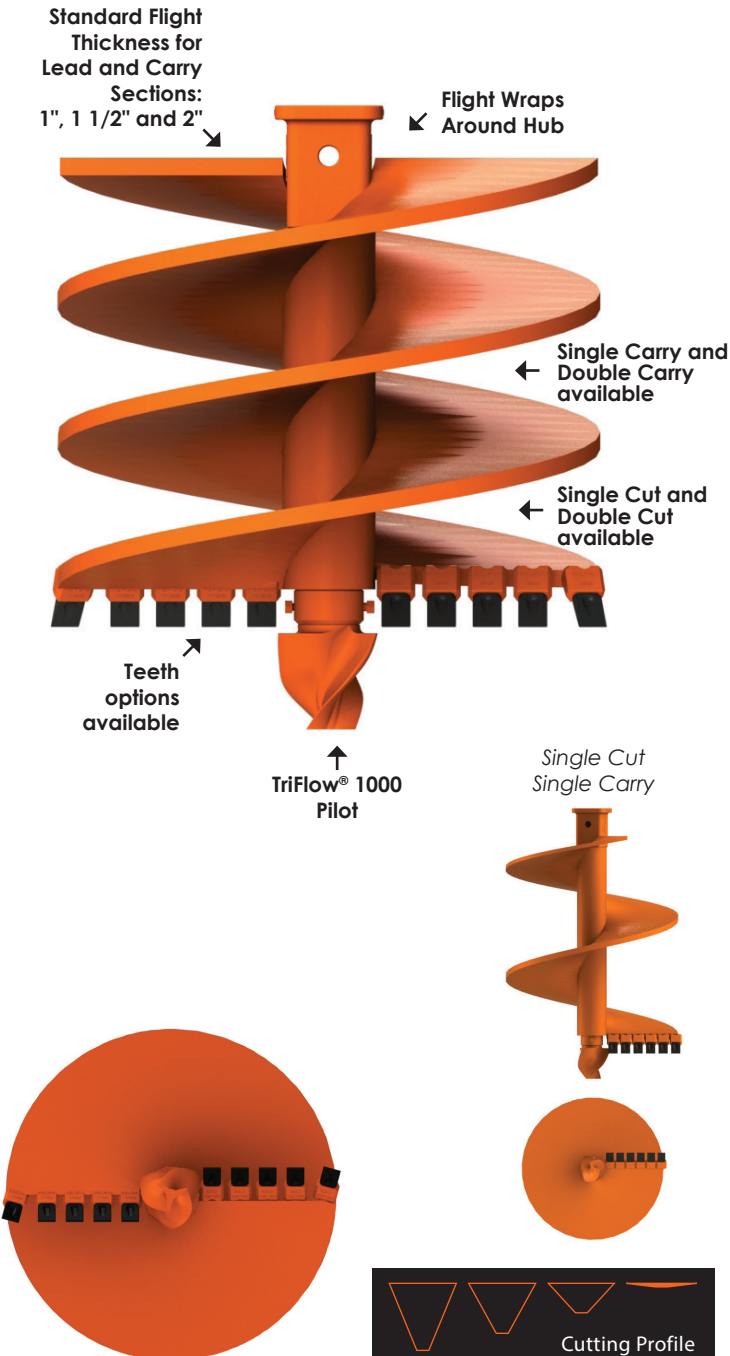

CONNECTIONS

SQUARE	3"	3 1/2"	4"
SQUARE	133MM	150MM	
SQUARE	177MM	200MM	

AUGER DIAMETERS

24" TO 120"

CUT DIAMETER

True Cut diameter is equal to the auger diameter.

DRILLING SOIL CONDITIONS:



Flat bottom dirt augers are perfect to drill holes for concrete footings. With single cut/single carry, double cut/single carry and double cut/double carry flight variations we can accommodate any drilling condition. For added performance and durability we have wrapped the flight around the hub. All dirt augers feature a hard-faced carry section and head with the three fluted TriFlow® pilot and 201/211 taper fit dirt teeth.

Contact Your Pengo Rep to Configure Your Foundation Auger Today!

ORANGE X PRESS

SPOT ON!
Configuring & Quoting


S-PATTERN DIRT AUGER



Double Cut and Double Carry shown

Standard Flight
Thickness for
Lead and Carry
Sections:
1", 1 1/2" and 2"

Flight Wraps
Around Hub

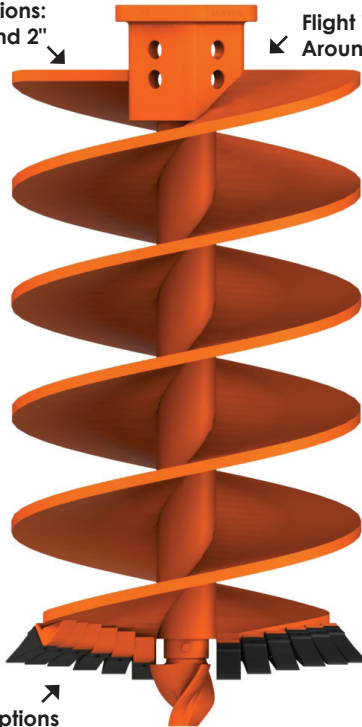


Single Carry
and
Double Carry
available

Single Cut and
Double Cut
available

Teeth options
available

TriFlow® 1000
Pilot

Double Cut
Single Carry



CONNECTIONS

SQUARE	3"	3 1/2"	4"
SQUARE	133MM	150MM	
SQUARE	177MM	200MM	

AUGER DIAMETERS

24" TO 120"

CUT DIAMETER

True Cut diameter is equal to the
auger diameter.

DRILLING SOIL CONDITIONS:

HIGHLY RECOMMENDED	RECOMMENDED	NOT RECOMMENDED
1 dirt	2 sand	3 silt
	4 clay	5 gravel
		6 fracturable rock
		7 non-fracturable rock



Contact Your Pengo Rep to Configure Your Foundation
Auger Today!

ORANGE X PRESS

SPOT ON!
Configuring & Quoting

The PENGU foundation dirt augers withstand the rigors of your job. Both double cut, single carry and double cut, double carry augers feature the TriFlow® pilot bit and taper-fit dirt teeth.

The hard-faced flight comes in thickness of 1" or 1 1/2" standard, other thickness are available upon request.